

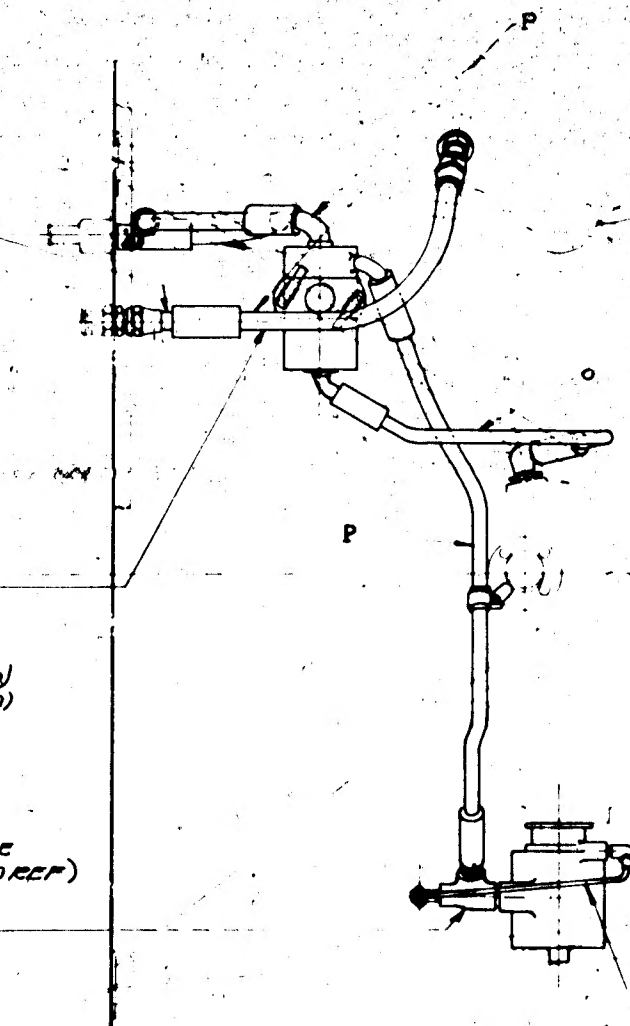
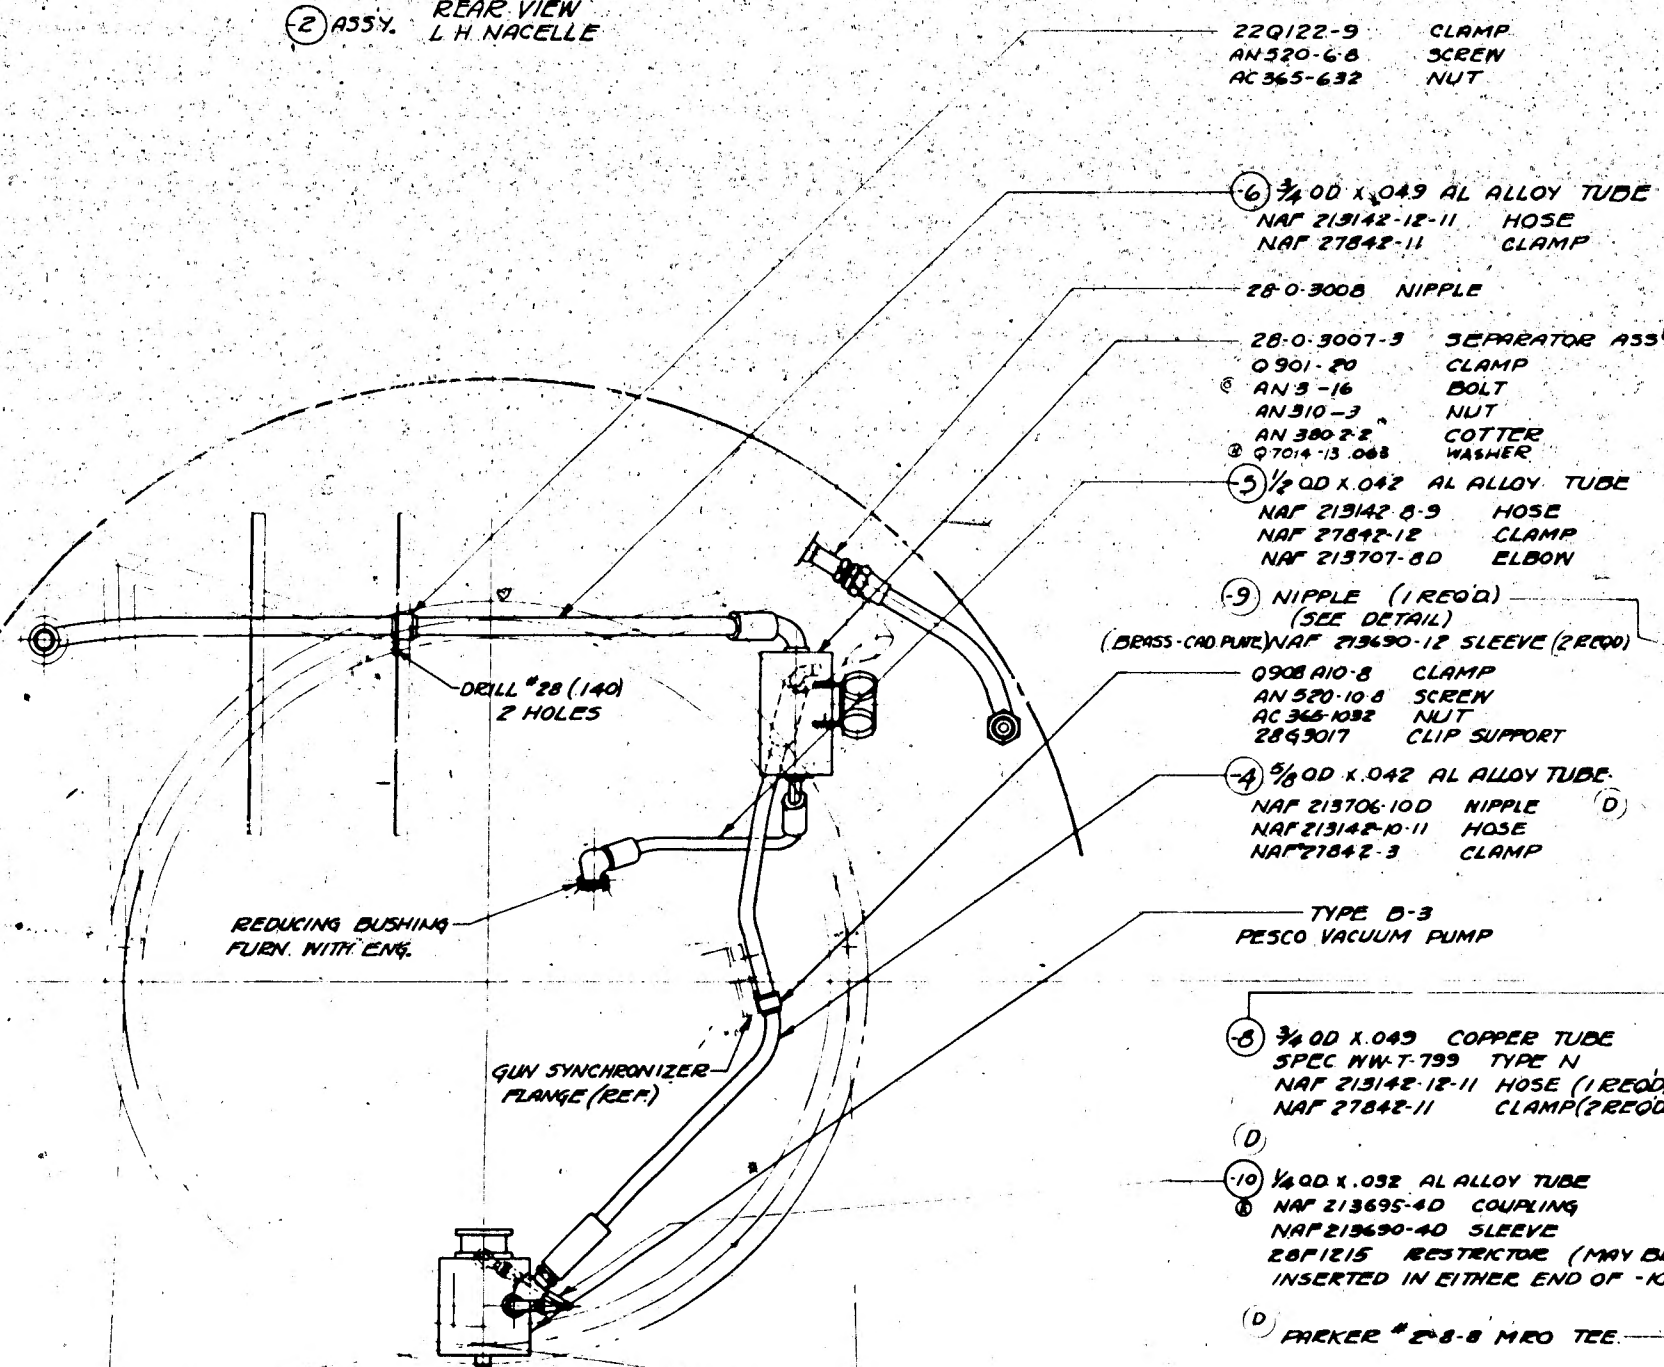


RIGHT SIDE VIEW
LH NACELLE



RIGHT SIDE VIEW
R.H. NACELLE

⑤ Assy. REAR VIEW
RH NACELLE

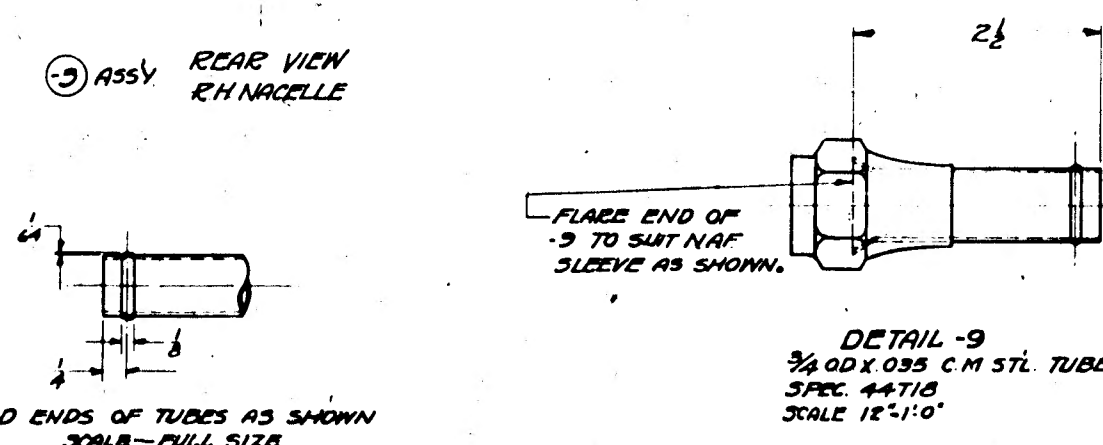

NOTES--

MARK OIL LINES WITH A BRIGHT YELLOW
BAND 1/2" WIDE NEAR EACH END.
PART #1 TO BE PAINTED IN BLACK NEAR
EACH END.
USE CHAFING HOSE & FRICTION TAPE WHERE
NECESSARY.
TAPE ALL HOSE UNDER CLAMPS.
USE PARKER THREADLUBE 6 PPE OR EQUIV.
ON ALL DUBAL THREADS.
ELECTRICAL BONDING SHALL BE IN ACCORDANCE
WITH DWS 28E119F.
ALL ALUM ALLOY TUBE SPEC 44F-32 COND A (5230)
FINISH TUBES 2-PERAL OUTSIDE.

① ALL PRESSURE LINES TO BE MARKED WITH LIGHT BLUE
& LIGHT GREEN BANDS NEAR EACH END.

② P. INDICATES PRESSURE
O. OIL LINES.

NOTE -
THIS INSTALLATION TO BE USED ON
PBX-3 SHIPS "0842 TO "0871 INCL. & "0901 TO "0907
INCL ONLY, ON PBX-4 ALL.
WHEN COMPLETE DE-ICING EQUIPMENT
IS INSTALLED.
SALES ORDER 925-31-1.

[illegible]